

ADT761A Firmware Upgrade Guide


1. Upgrade by U-Disk

(1) Copy the upgrade package file (the file extension is ".apcupdate") to the root directory of the USB flash drive (the USB flash drive must be in FAT16 or FAT32 format).


(2) Insert the USB flash drive into the USB port on the left side of the 761A.




(3) Select "Menu", then Select "Setup".

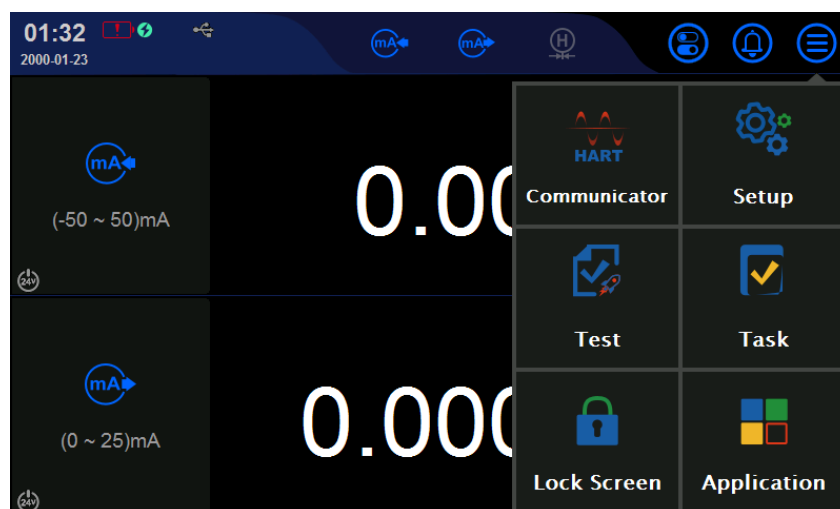


(4) Select “Service” in the Setup screen.

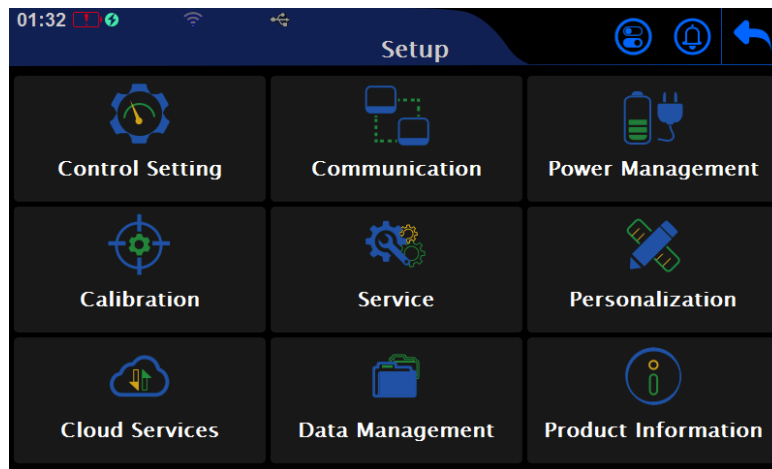

(5) Select “System Update”, then select “U-Disk Upgrade”.

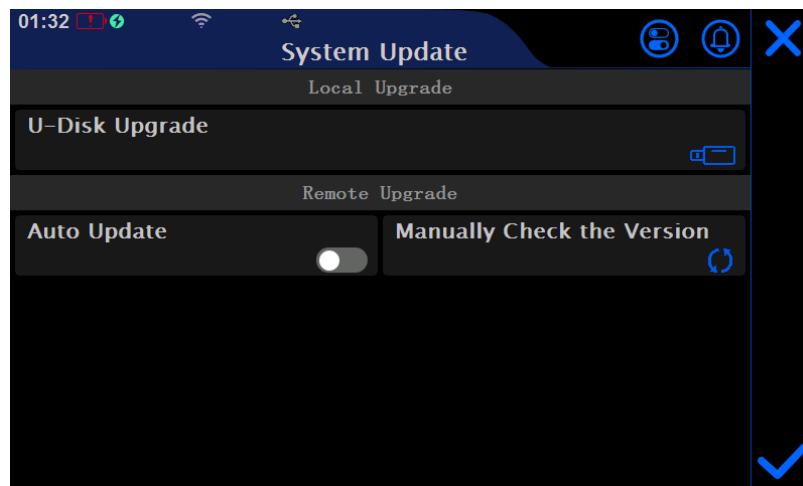


(6) Select the upgrade package you want to install.

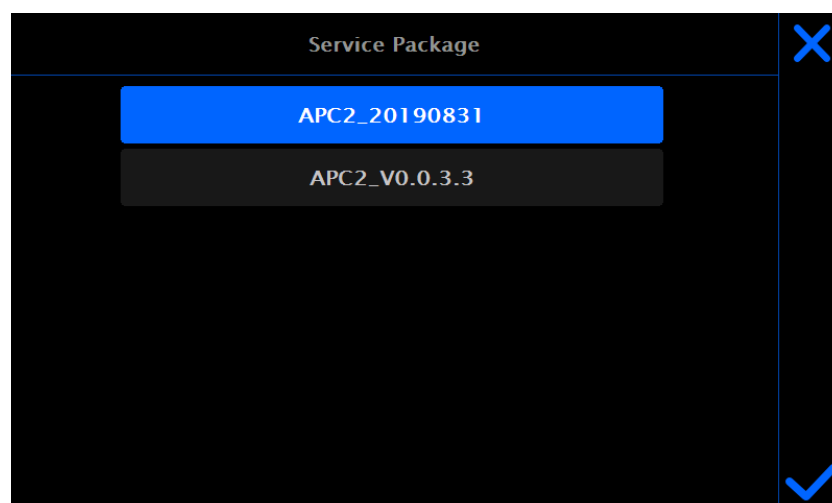


(7) The system will automatically start the upgrade process. During the upgrade process, the version information to be upgraded will be displayed. After the upgrade is complete, the upgrade results of each component will be displayed (✓ indicates that the upgrade is successful, X indicates that the upgrade failed, N/A indicates no upgrade), The system will be restarted after the upgrade is complete.

2. Upgrade by Cloud Service (remote upgrade)


- (1) Confirm that the network is connected (WIFI or Ethernet).
- (2) Select “Menu”, and then select “Setup”.

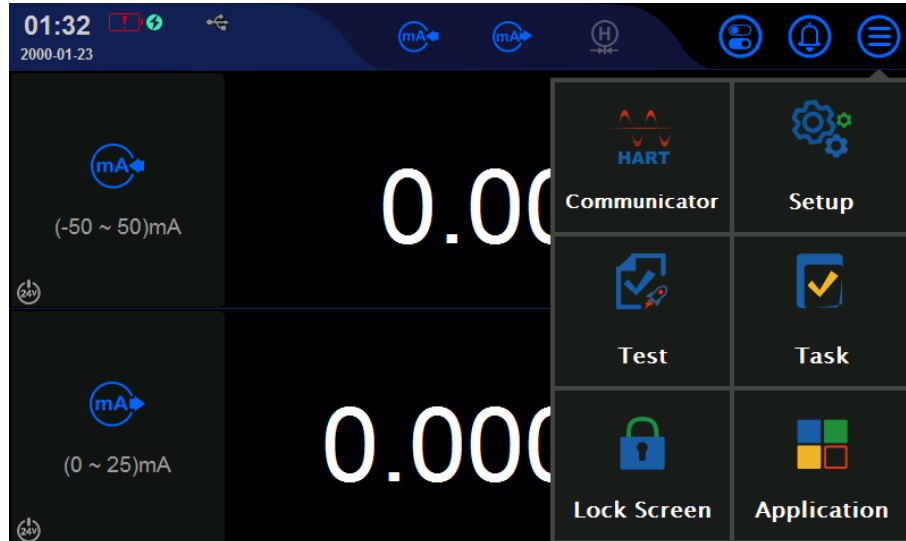

- (3) Select “Service” in the Setup screen.

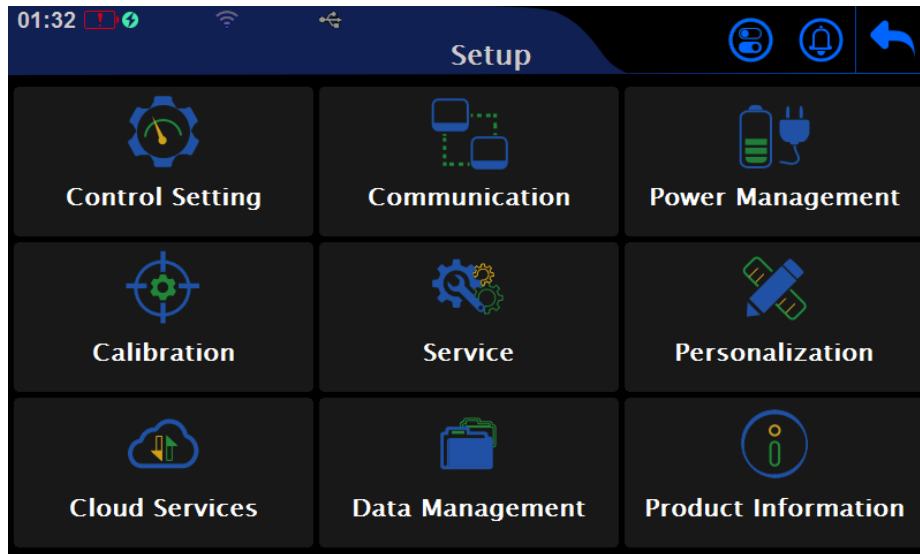

(4) Select "System Update". Then Select "Manually Check the Version", or keep the "Auto Update" is opened.

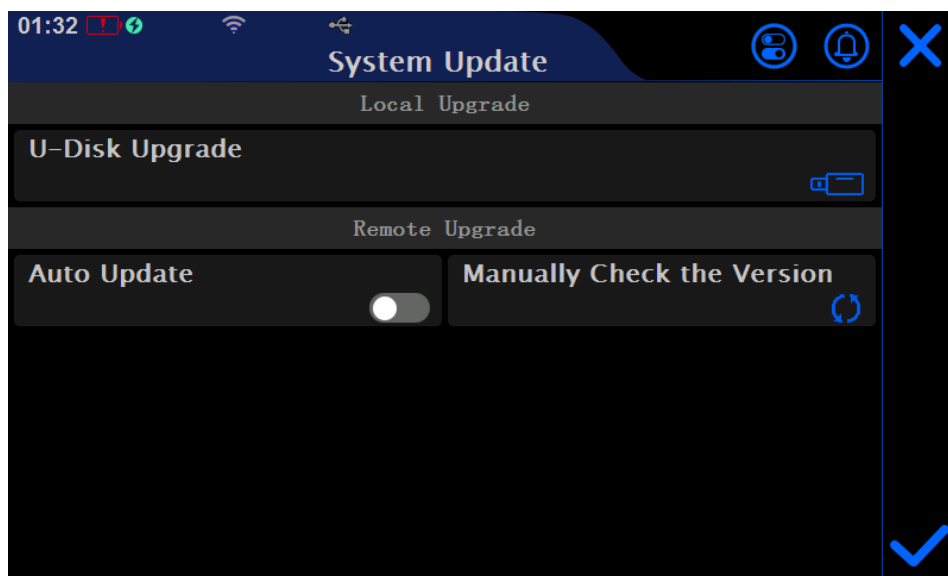

(5) When the new version of the installation is successfully detected, click the "Version Number" button to download the installation package and automatically upgrade the system. After the upgrade is complete, the system will be restarted.

